

Features

- 12A carrying current
- 1H and 1Z contact form available construction
- Standard PC layout

PCB Relay



Contact Ratings

Contact Ratings	1H 1Z
Contact Resistance	100mΩ(at 1A 6VDC)
Contact Material	银合金 Silver Alloy
Contact capacity	10A 250VAC, 7A 250VAC

Specification

Insulation Resistance	100MΩ 500VDC
Dielectric Strength	BCC 1500V 1 min
	BOC 750V 1 min
Operate Time	10ms/5ms
Terminal Type	PCB

Coil Ratings

Nominal Coil Power	0.36W,0.45W
--------------------	-------------


Coil Versions

Nominal Voltage VDC	Coil Resistance at 20°C±10%(Ω)		Max Operate Voltage (VDC)	Min Release Voltage (VDC)	Max Applicable Voltage (VDC)
	0.36W	0.45W			
3	25	20	2.25	0.3	3.9
5	70	55	3.75	0.5	6.5
6	100	80	4.50	0.6	7.8
9	225	180	6.75	0.9	11.7
12	400	320	9.00	1.2	15.6
24	1600	1280	18.00	2.4	31.2
48	6400	5100	36.00	4.8	62.4



JQC-3F(T73)

Dimension.Bottom View

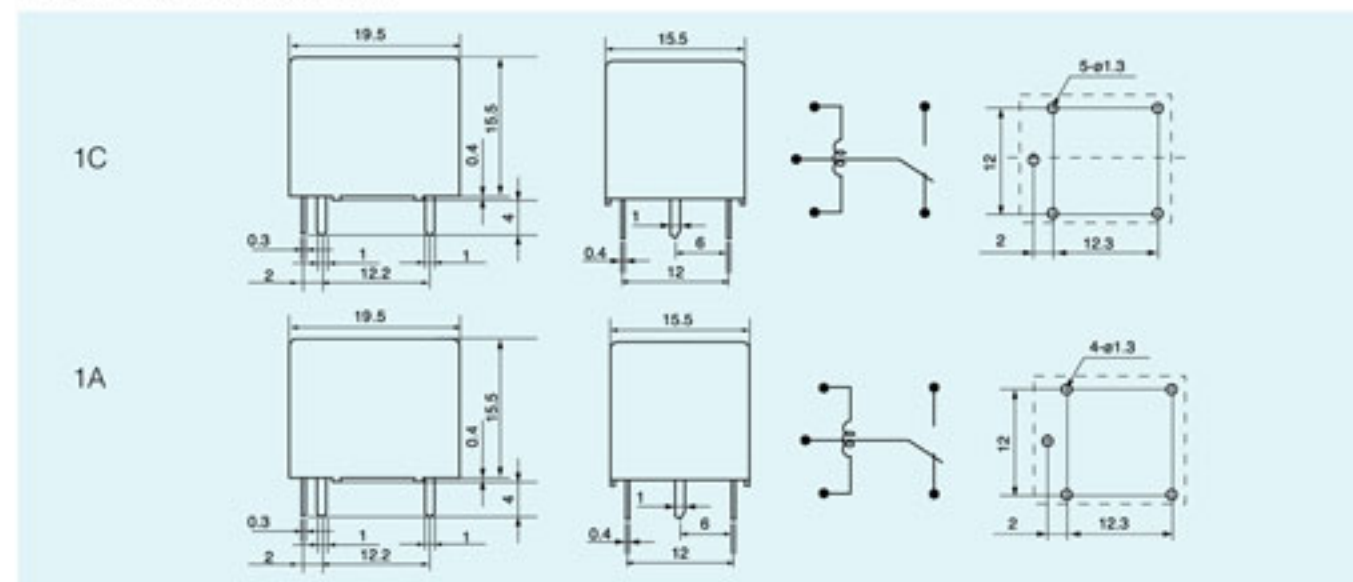

Reference Data

