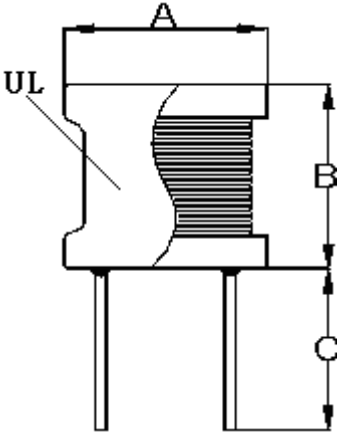



SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:	
PART NO: RC0810U-220K		DWG.NO: HX4007311	
CUSTOMER PART NO:		CUST.DWG.NO:	
(1) DIMENSION(UNIT: mm) 		A	10.5 (MAX) m/m
		B	12.0 (MAX) m/m
		C	15.0 ± 2.0 m/m
		D	m/m
		E	m/m
		F	m/m
		G	m/m
		H	m/m
		I	m/m
		J	m/m
(2)ELECTRICAL REQUIREMENTS		(3)SCHEMATIC	
L (uH)	22 ± 10%		
RDC (Ω)	0.15 (MAX)		
IDC (A)	3 (MAX)		
TEST CONDITION	1KHz / 0.25V		
		APPROVED BY 吳載敏	
		CHECKED BY 張明德	
		DRAWN BY 黃慧診	

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:				
PART NO: RC0810U-220K				DWG.NO: HX4007311				
CUSTOMER PART NO :				CUST.DWG.NO :				
TEST CONDITION: 1KHz / 0.25V				DIMENSION (UNIT : mm)				
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C		
SPEC	22 ± 10%	0.15 (MAX)	3 (MAX)	10.5 (MAX)	12.0 (MAX)	15.0 ± 2.0		
1	23.68	0.071	OK	9.86	11.00	15.67		
2	23.64	0.071	OK	9.80	10.89	15.72		
3	23.41	0.068	OK	9.86	10.95	15.73		
4	23.65	0.075	OK	9.79	10.98	15.62		
5	23.48	0.067	OK	9.85	10.89	15.55		
6	23.68	0.071	OK	9.91	11.02	15.48		
7	23.51	0.069	OK	9.86	10.96	15.50		
8	23.62	0.066	OK	9.89	10.91	15.46		
9	23.83	0.068	OK	9.90	10.97	15.84		
10	23.74	0.069	OK	9.77	10.80	15.56		
X	23.624	0.07		9.849	10.937	15.613		
R	0.42	0.009		0.14	0.22	0.38		
TEST INSTRUMENTS HM2791 METER FOR L						APPROVED BY		
						吳載敏		
						CHECKED BY		
						張明德		
						DRAWN BY		
						黃慧診		

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw